


external power supply
or battery (3.3 V - 6 V)

Sensor board

2 pin male header
for battery connection

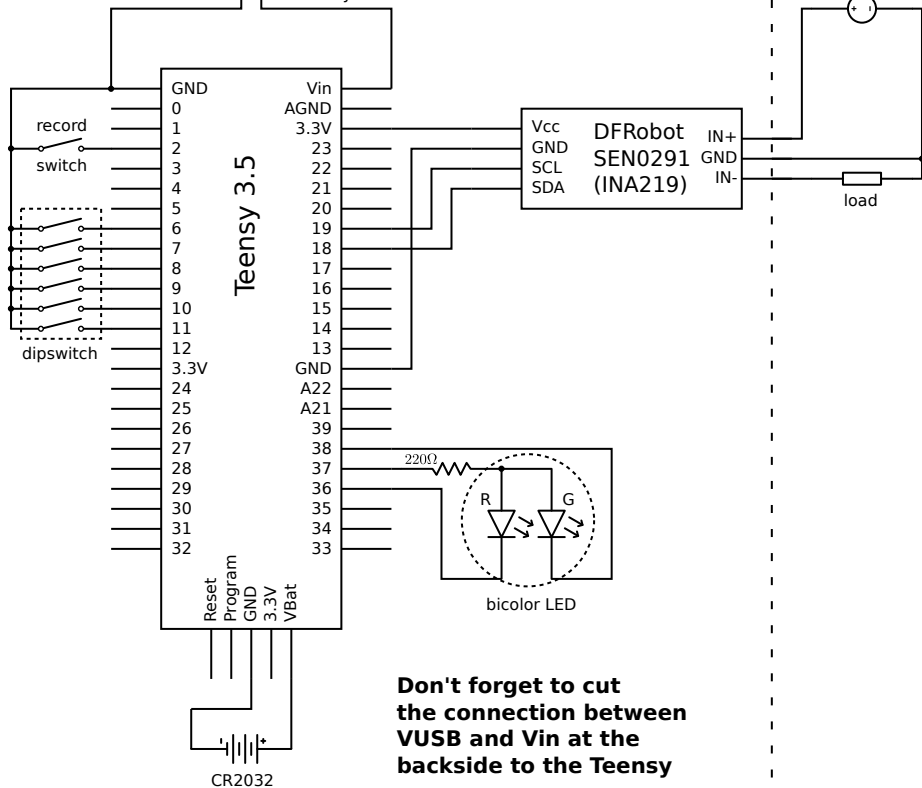

CR2032