

Model: SCT013-060

## Characteristic:

Opening size 13mmx13mm, Compatible to foreign products, leading wire 1 metre, standardΦ3.5 three core plug output, current & voltage two types of output. (Patent No. ZL 2015 3 0060067.X)

## Technical indicators:


Hanging installation, leading wire output  
Fire resistance property: UL94-V0  
Standard: GB1208-2006  
Work temperature: -25℃ ~ +70℃  
Storage temperature: -30℃ ~ +90℃  
Work voltage: 660V  
Frequency range: 50Hz-1KHz  
Dielectric strength: 3.5KV 50Hz 1min

## Electric parameter:


|                          |       |   |
|--------------------------|-------|---|
| Rated input(rms)         | 60    | A |
| Max.Input                | 75    | A |
| Rated output             | 1     | V |
| Turns ratio              |       |   |
| Accuracy                 | ± 1   | % |
| Linearity                | ≤ 0.2 | % |
| Phase error              |       |   |
| max: Sampling resistance |       | Ω |
| Weight                   | 50    | g |



## Characteristic curve in different load volt-ampere:



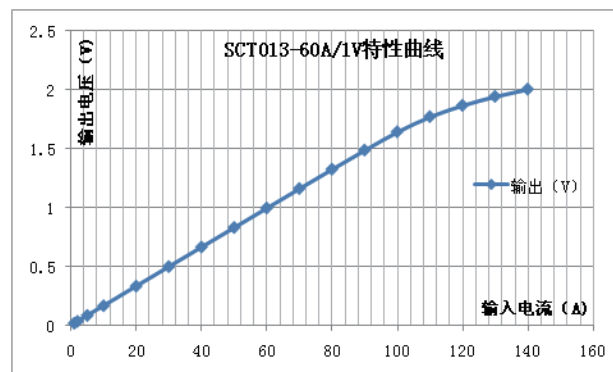


## Wiring diagram:

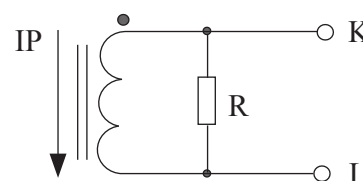

Built-in with sampling resistance  
voltage output type

## Outline size diagram(in mm):

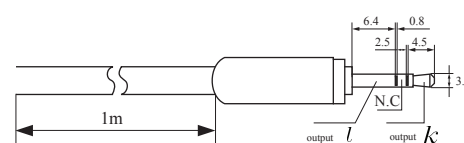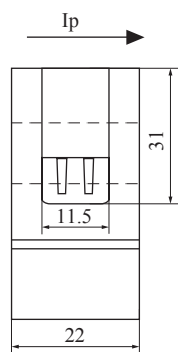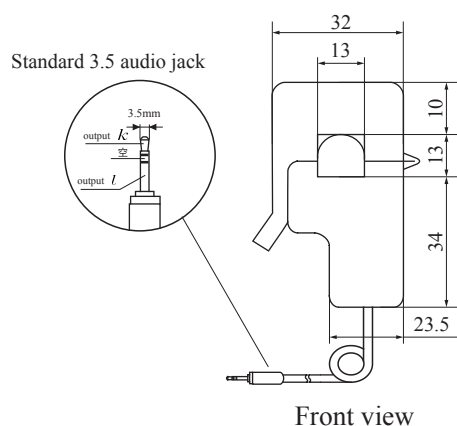

Standard three core jack schematic diagram