


Congratulations! You passed!

TO PASS 80% or higher

Keep Learning

GRADE
90%

Your skill score is improving!
You've made progress in Statistical Programming. [View Skill Tracking.](#)

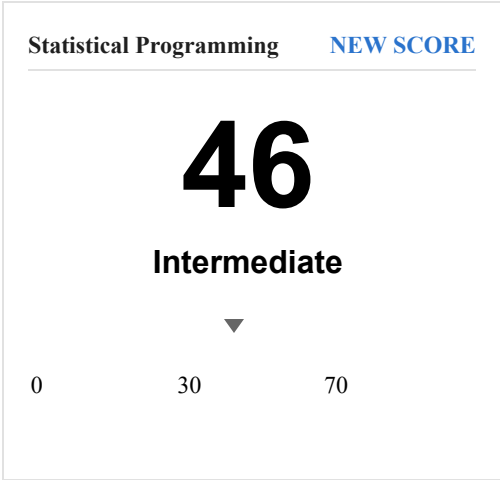

Module 3 Graded Assessment

LATEST SUBMISSION GRADE

90%

1. Fill in the blanks of this code to print out the numbers 1 through 7. 1 / 1 point

```
1 number = 1
2 while number <= 7:
3     print(number, end=" ")
4     number = number + 1
```

Run

Reset

1 2 3 4 5 6 7



Correct

Nice job! You're really getting the hang of what goes into the while loops!

2. The `show_letters` function should print out each letter of a word on a separate line. Fill in the blanks to make that happen. 1 / 1 point

```
1 def show_letters(word):
2     for l in word:
3         print(l)
4
5 show_letters("Hello")
6 # Should print one line per letter
```

[Run](#)[Reset](#)

```
H
e
l
l
o
```



Correct

Great job! You're working the "for" loops the way they're supposed to be done!

3. Complete the function `digits(n)` that returns how many digits the number has. For example: 25 has 2 digits and 144 has 3 digits. Tip: you can figure out the digits of a number by dividing it by 10 once per digit until there are no digits left. 0 / 1 point

```
1 def digits(n):
2     count = 0
3     if n == 0:
4         ____
5     while (____):
6         count += 1
7     ____
8     return count
9
10 print(digits(25))    # Should print 2
11 print(digits(144))  # Should print 3
12 print(digits(1000)) # Should print 4
13 print(digits(0))    # Should print 1
```

[Run](#)[Reset](#)

Incorrect

InfraError

4. This function prints out a multiplication table (where each number is the result of multiplying the first number of its row by the number at the top of its column). Fill in the blanks so that calling `multiplication_table(1, 3)` will print out: 1 / 1 point

1 2 3

2 4 6

```

1 def multiplication_table(start, stop):
2     for x in range(1,4):
3         for y in range(1,4):
4             print(str(x*y), end=" ")
5         print()
6
7 multiplication_table(1, 3)
8 # Should print the multiplication table shown above

```

Run

Reset

```

1 2 3
2 4 6
3 6 9

```

**Correct**

Awesome! You've stepped up to the challenge of one of the more complex coding practices, nested loops!

5. The counter function counts down from start to stop when start is bigger than stop, and counts up from start to stop otherwise. Fill in the blanks to make this work correctly.

1 / 1 point

```

1
2 def counter(start, stop):
3     x = start
4     if start > stop:
5         return_string = "Counting down: "
6         while x >= stop:
7             return_string += str(x)
8             if x != stop:
9                 return_string += ","
10            x -= 1
11     else:
12         return_string = "Counting up: "
13         while x <= stop:
14             return_string += str(x)
15             if x != stop:
16                 return_string += ","
17            x += 1
18     return return_string
19
20 print(counter(1, 10)) # Should be "Counting up: 1,2,3,4,5,6,7,8,9,10"
21 print(counter(2, 1)) # Should be "Counting down: 2,1"
22 print(counter(5, 5)) # Should be "Counting up: 5"

```

Run

Reset

```

Counting up: 1,2,3,4,5,6,7,8,9,10
Counting down: 2,1
Counting up: 5

```

**Correct**

You nailed it! You've figured out all of the situations that need to be considered!

6. The loop function is similar to `range()`, but handles the parameters somewhat differently: it takes in 3 parameters: the starting point, the stopping point, and the increment step. When the starting point is greater than the stopping point, it forces the steps to be negative. When, instead, the starting point is less than the stopping point, it forces the step to be positive. Also, if the step is 0, it changes to 1 or -1. The result is returned as a one-line, space-separated string of numbers. For example, `loop(11,2,3)` should return 11 8 5 and `loop(1,5,0)` should return 1 2 3 4. Fill in the missing parts to make that happen.

```

1
2 def loop(start, stop, step):
3     return_string = ""
4     if step == 0:
5         step=1
6     if start > stop:
7         step = abs(step) * -1
8     else:
9         step = abs(step)
10    for count in range(start, stop, step):
11        return_string += str(count) + " "
12    return return_string.strip()
13
14 print(loop(11,2,3)) # Should be 11 8 5
15 print(loop(1,5,0)) # Should be 1 2 3 4
16 print(loop(-1,-2,0)) # Should be -1
17 print(loop(10,25,-2)) # Should be 10 12 14 16 18 20 22 24
18 print(loop(1,1,1)) # Should be empty
19

```

Run

Reset

```

11 8 5
1 2 3 4
-1
10 12 14 16 18 20 22 24

```



Correct

Woohoo! You're looping through the numbers backwards and forwards, like a pro!

7. The following code raises an error when executed. What's the reason for the error?

```

1 def decade_counter():
2     while year < 50:
3         year += 10
4     return year

```

- ☐ Incrementing by 10 instead of 1
- ☒ Failure to initialize variables
- ☐ Nothing is happening inside the while loop
- ☐ Wrong comparison operator



Correct

Well done! The variable year needs to be initialized prior to being used in the while loop.

8. What is the value of x at the end of the following code?

1 / 1 point

```
1 for x in range(1, 10, 3):  
2     print(x)
```

7



Correct

You got it! The upper limit of a range isn't included, which means that the loop stops before reaching it. The increment is 3, so the loop stops when x reaches 7.

9. What is the value of y at the end of the following code?

1 / 1 point

```
1 for x in range(10):  
2     for y in range(x):  
3         print(y)
```

8



Correct

Great job! The upper limit of a range isn't included, which means that the outer loop goes up to 9, so the highest upper limit for the inner loop is 9, which is also not included.

10. How does this function need to be called to print yes, no, and maybe as possible options to vote for?

```
1 def votes(params):  
2     for vote in params:  
3         print("Possible option:" + vote)  
4
```

☐ votes("yes", "no", "maybe")

- ☐ votes(yes, no, maybe)
- ☐ votes([yes, no, maybe])
- ☒ votes(['yes', 'no', 'maybe'])



Correct

Excellent! This function is looking for one argument, and the list of strings is just one argument.